-QIANYUE CASTER-

# 120 SERIES:PNEUMATIC WHEEL HEAVY DUTY CASTER

**1.Strong shock absorption performance, suitable for complex terrains.**

**2. The bracket surface is treated with spray coating and electroplated zinc.**

**3.High passability, suitable for outdoor use.**

**4.Strict quality control and thorough testing.**

121-S-RB

121-R-RB

121-S-RB

121-R-RB

| ITEM NO | diameterxwidth (mm) | plate size (mm) | bore hole spacing (mm) | Hole Size(mm) | Axle Size(mm) | Bore Hole Size(mm) | Base plate/Bracket Thickness ( mm ) | loading height (mm) | load capacity (KG) |
|---|---|---|---|---|---|---|---|---|---|
| 8" | 200x64 | 114x102 | 85x72.5 | 11.2x19.6 | / | / | 5.5/5.5 | 258 | 350 |
| 10" | 250x86 | 114x102 | 85x72.5 | 11.2x19.6 | / | / | 5.5/5.5 | 308 | 400 |

## CAD

## 8"Top plate swivel

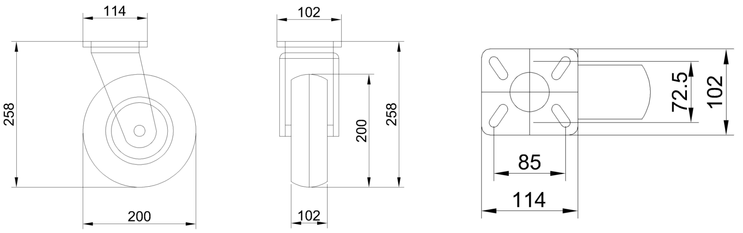


## Product Advantage

- Complies with EU REACH and ROHS certification
- High quality-price ratio
- Passed 24 hours salt spray
- Adequate accessories and fast delivery
- Advanced equipment electroplating

## Our Electroplating VS Traditional electroplatin

| Our Electroplating | | Traditional electroplating |
|---|---|---|
| • Oil removal: Three processes to ensure thorough and stable oil removal | VS | • Oil removal: one process |
| • Pickling： Two processes ensure cleaner washing | VS | • Pickling： one process |
| • Increase chemical polishing to enhance electroplating brightness | VS | • No increase in chemical polishing |
| • Longer plating time, more than 1.5 hours double anode | VS | • 1 hour single anode |
| • The use of environmentally friendly water cleaning to meet environmental requirements | VS | • Use of common potion |

## Production & Delivery