-QIANYUE CASTER-

80A SERIES:LOW PROFILE CASTER

1. The bracket can be electrophoretic black or galvanized. The styles are fixed, movable and with brakes to meet the needs of different equipment.
2. The low profile design can improve the stability of the equipment and reduce vibration shock
3. The low profile design can improve the stability of the equipment and reduce vibration shock
4. 365-day online customer service

80A-S-NL

80A-R-NL

80A-STB-NL

80A	diameterxwidth (mm)	plate size (mm)	bore hole spacing (mm)	Hole Size(mm)	Axle Size(mm)	Bore Hole Size(mm)	Base plate/Bracket Thickness (mm)	loading height (mm)	load capacity (KG)
1. 25"	30x30	66x48	50x34	6.3	/	/	3/2.5	49	130
1. 5"	40x30	66x48	50x34	6.3	/	/	3/2.5	58	150

CAD

1.2"Top plate swivel with brake

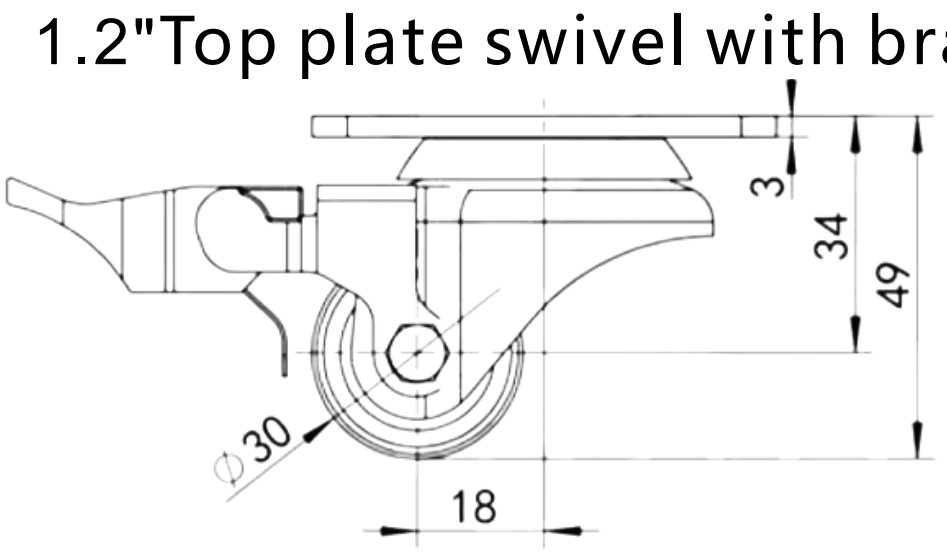

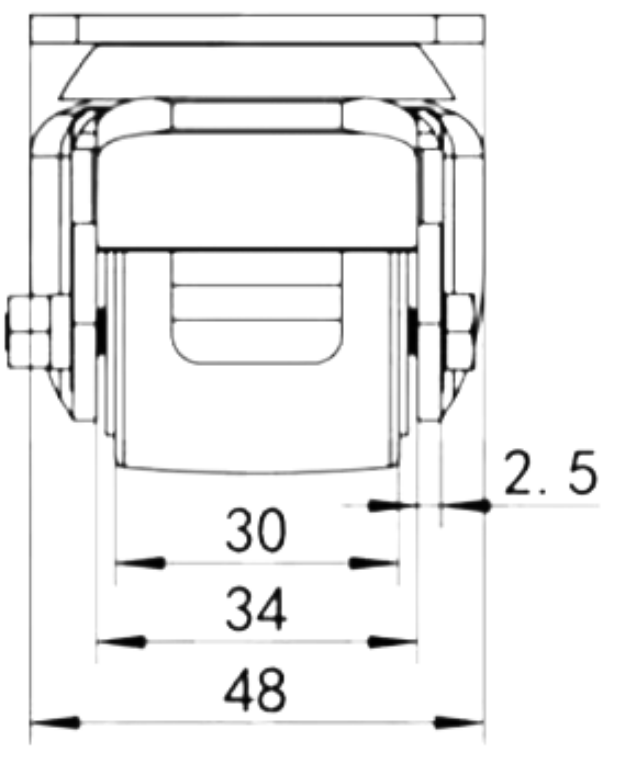

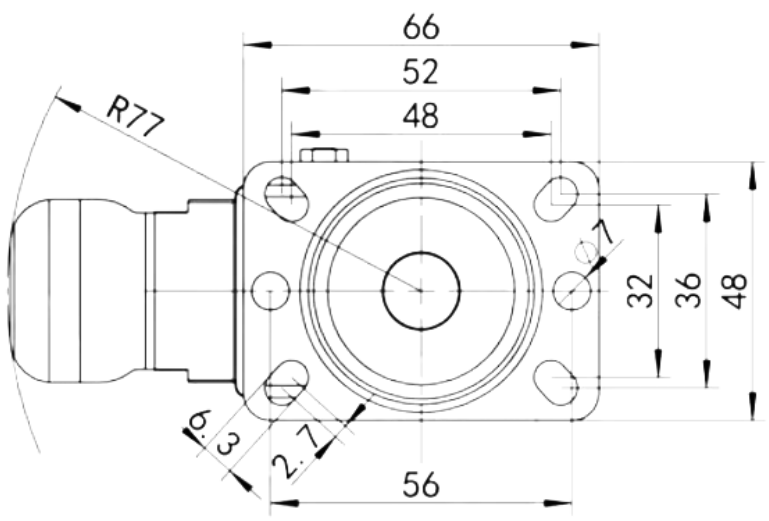

Product Advantage

- Complies with EU REACH and ROHS certification
- High quality-price ratio
- Passed 24 hours salt spray
- Adequate accessories and fast delivery
- Advanced equipment electroplating

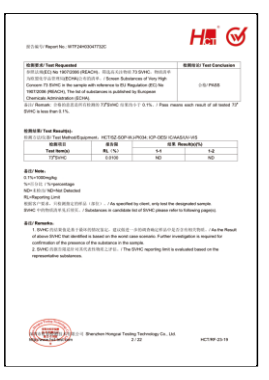

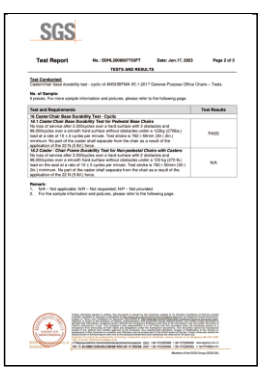

Our Electroplating VS Traditional electroplatin

Our Electroplating	VS	Traditional electroplating
• Oil removal: Three processes to ensure thorough and stable oil removal	VS	• Oil removal: one process
• Pickling： Two processes ensure cleaner washing	VS	• Pickling： one process
• Increase chemical polishing to enhance electroplating brightness	VS	• No increase in chemical polishing
• Longer plating time, more than 1.5 hours double anode	VS	• 1 hour single anode
• The use of environmentally friendly water cleaning to meet environmental requirements	VS	• Use of common potion
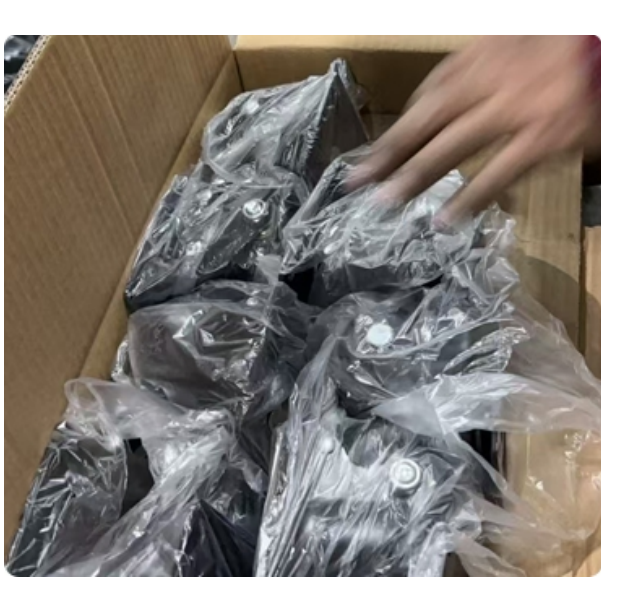
Production & Delivery