-QIANYUE CASTER-

82 SERIES：PP LOW PROFILE CASTER

1. Stronger load-bearing capacity and longer life

2. Low center of gravity design, more stable and smoother operation

3. Spot supply, worry-free purchase

82-S-PP

82-R-PP

82-STB-PP

82-SLB-PP

82-T-PP

82-TB-PP

82-H-PP

82-HTB-PP

ITEM NO	diameterxwidth (mm)	plate size (mm)	bore hole spacing (mm)	Hole Size(mm)	Axle Size(mm)	Bore Hole Size(mm)	Base plate/Bracket (mm)	loading height (mm)	load capacity (KG)
1.5"	40x30	66x50	49.2x32.3	6x8.2	M12x30	M12	2.3/2	62	70
2"	50x30	72x54	55.5x38	7x9	M12x30	M12	2.3/2.3	73	80
2.5"	65x40	94x68	72x43.4	9.1x12	M12x30	M12	3/3	92	180
3"	75x45	105x80	82.8x60	9x11	M12x30	M12	3.5/3	105	250

CAD

2"Top plate swivel

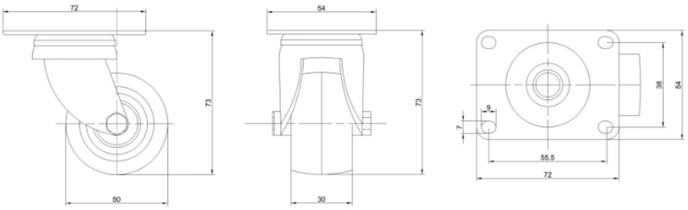

Product Advantage

- Complies with EU REACH and ROHS certification
- High quality-price ratio
- Passed 24 hours salt spray
- Adequate accessories and fast delivery
- Advanced equipment electroplating

Our Electroplating VS Traditional electroplatin

Our Electroplating

- Oil removal: Three processes to ensure thorough and stable oil removal
- Pickling： Two processes ensure cleaner washing
- Increase chemical polishing to enhance electroplating brightness
- Longer plating time, more than 1.5 hours double anode
- The use of environmentally friendly water cleaning to meet environmental requirements

VS

Traditional electroplating

VS • Oil removal: one process

VS • Pickling： one process

VS • No increase in chemical polishing

VS • 1 hour single anode

VS • Use of common potion

Production & Delivery