-QIANYUE CASTER-

108 SERIES: CHROME PLATED BRACKET TPR LIGHT DUTY CASTOR

1. Complete specifications
2. TPR wheel is equipped with precision bearings, which is quiet, smooth, and durable
3. The monthly production capacity can reach 2 million pieces
4. There has been almost zero complaint rate in the past 6 years of production

108-S-TPR

108-R-TPR

108-STB-TPR

108-T-TPR

108-TB-TPR

108-LTB-TPR

108-UTB-TPR

ITEM NO	diameterxwidth (mm)	plate size (mm)	bore hole spacing (mm)	Hole Size(mm)	Axle Size(mm)	Bore Hole Size(mm)	Bracket Thickness (mm)	loading height (mm)	load capacity (KG)
1"	25x13	38x30	29x21	4.2	M6x15	/	1.2/1.2	38	10
1.25"	32x13	39x33	30x23	4.2	M6x15	/	1.2/1.2	43	15
1.5"	38x17	46x40	36x28	5.2	M8x15	/	1.5/1.5	53	20
A2"	50x18	46x40	36x28	5.2	M8x15	/	1.5/1.5	64	25
B2"	50x20	61x50	45x32	6.2	M10x25	/	1.5/1.5	75	35
2.5"	63x22	70x52	52x33	6.2	M10x25	/	1.8/1.8	90	55
3"	75x25	73x60	54x39	8.2	M10x25	/	2/1.8	103	65
4"	100x32	73x60	54x39	8.2	M10x25	/	2/1.8	129	75

CAD

1.5"Top plate swivel

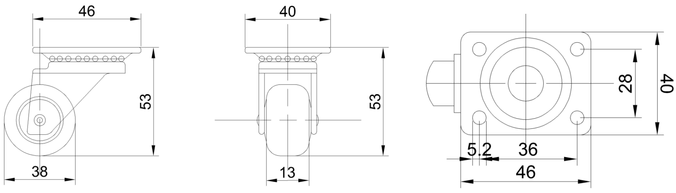

Product Advantage

- Complies with EU REACH and ROHS certification
- High quality-price ratio
- Passed 24 hours salt spray
- Adequate accessories and fast delivery
- Advanced equipment electroplating

Our Electroplating VS Traditional electroplatin

Our Electroplating	VS	Traditional electroplating
• Oil removal: Three processes to ensure thorough and stable oil removal	VS	• Oil removal: one process
• Pickling： Two processes ensure cleaner washing	VS	• Pickling： one process
• Increase chemical polishing to enhance electroplating brightness	VS	• No increase in chemical polishing
• Longer plating time, more than 1.5 hours double anode	VS	• 1 hour single anode
• The use of environmentally friendly water cleaning to meet environmental requirements	VS	• Use of common potion

Production & Delivery